



















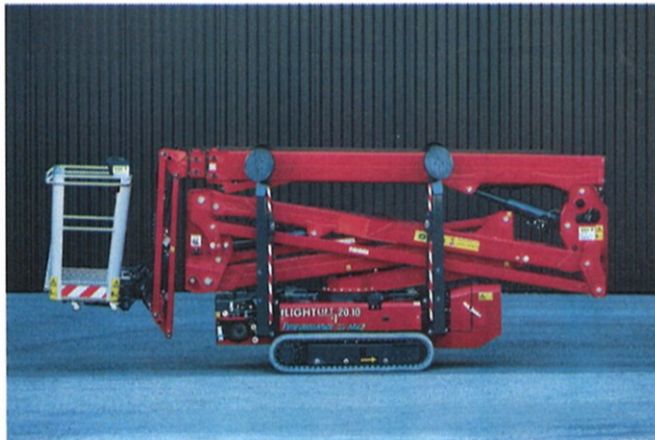
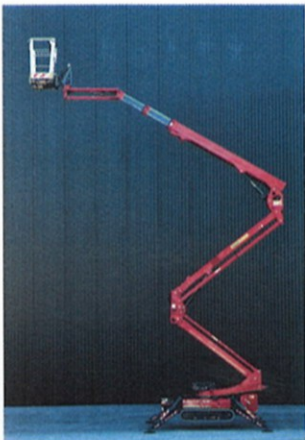


-  20,15 m
-  9,70 m
-  5,01 m
-  4,66 m
-  1,99 m
-  1335x690x1100 mm
-  124° (+/-62°)
-  16° / 28,7%
-  2840 kg / 6261 lb (Honda)
2940 kg / 6481 lb (Kubota)
2950 kg / 6503 lb (Lithium)
-  Honda iGX 390- 11,7 PS
3600 UpM, Kubota Z 602 -
14,5 PS 3200 UpM
-  230 V / 50 Hz - 2,2 kW
110 V / 50 Hz - 2,2 kW
-  795 - 1095 mm
-  0,5- 1,3 - 2,5 Km/h
-  2150 daN - 3,04 daN/cm²
-  2922 x 2925 mm
-  IIS - Abstütz- und Einfahr-
automatik serienmäßig
-  Remote control
Kabelfernbedienung
-  GPRS-GPS
-  R.A.H.M.
-  100 Ah / 72 V
Optional - Optional



Lightlift 20.15 Performance IIS